



Select desired leadwire termination and options (if desired), by order code numbers below.


OPTION #3




OPTION #4, 5



OPTION #8

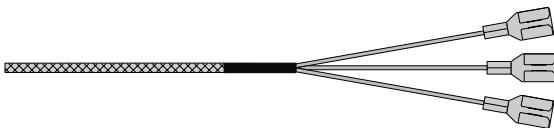

OPTION #6, 7



EXAMPLE ORDER NUMBER: Table 1 Table 2 Table 3 Table 4 Table 5
R1T185L48063T - 01A,306 - 15 - 3036 - 4

TERMINATIONS and OPTIONS			
ORDER CODE	DESCRIPTION	ORDER CODE	DESCRIPTION
1	Leads not stripped	6	Miniature RTD plug (350°F max)
2	Leads stripped 2" tinned 1/2"	7	Miniature RTD plug with mating jack (350°F max)
3	Leads stripped 2" with spade lugs	8	1/4" quick disconnect female terminal lug - 2" leads
4	Standard RTD male plug (350°F max)	9	Standard RTD jack (350°F max)
5	Standard RTD male plug with mating jack (350°F max)	41	Miniature RTD jack (350°F max)
OPTIONS			
B	1/2" NPT Bx Conn. w/Opt. 1, 2, or 3	CG	1/2" NPT weatherproof nylon cord grip on PVC or Teflon covered flexible armor
CL	Plug or jack secured to leads with cable clamp		
RB	Rubber boot (single & standard size plugs and jacks only)	Z	Special construction (specify)